

# WIDE1 24V-AC/DC



IP67  
 20w - 2490 Lm  
 40w - 4980 Lm  
 6.000°K - 40.000h  
 RoHS RAEE CONFORMITY



Connettore dritto con cavo 5mt  
 Straight Female connector with power cable



Connettore a 90° con cavo 5mt  
 90° Female connector with power cable 5mt



Versione WIDE1 C con Connettore M12 a 4-poli  
 WIDE1 C version with M12 Male connector at 4-pin





Versione WIDE1 P con Pressa-cavo  
 WIDE1 P version with cable clamp

## CARATTERISTICHE

Fino all'85% di risparmio energetico  
 Basso calore  
 Zero manutenzione  
 Struttura in alluminio  
 Dotata di vetro ad alta resistenza e griglia di lenti anti-irritazione per gli occhi  
 Resistente ai lubrificanti e refrigeranti  
 Direttive 2006/95/CE, 2004/108/CE e 2006/42/CE come previsto dalla Normativa EN 1387

## FEATURES

Up to 85% energy saving  
 Low performing heat  
 Zero maintenance  
 Aluminium structure  
 Equipped with high resistance glass and anti-irritation lens grid  
 Resistant to coolants and lubricants  
 Complies with Directives 2006/95/EC, 2004/108/EC and 2006/42/EC as required by Normative EN 1387

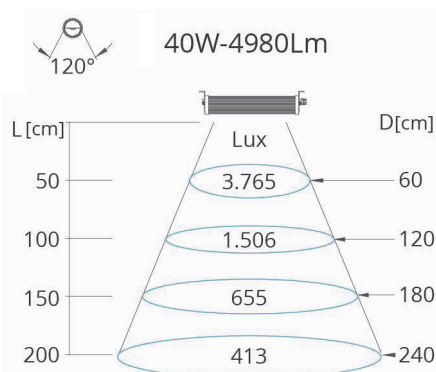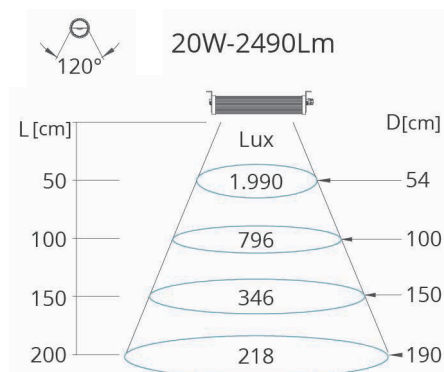

2 versioni di potenza e lunghezza:

- WIDE1-201 con 1 Set di Led (Nr.48) per una potenza totale di 20W
- WIDE1-202 con 2 Set di Led (Nr.96) per una potenza totale di 40W

Alimentazione:

alimentatore 24V-AC/DC integrato e supporti di fissaggio basculanti

ATTENZIONE:

per le \*WIDE1 C bisogna sempre ordinare i connettori

Femmina con cavo a scelta tra:

- Connettore Femmina Dritto con cavo da 5 mt.
- Connettore Femmina a 90° con cavo da 5 mt.

2 power and length options:

- WIDE1-201 with 1 Set of LEDs (No.48) for a total of 20W
- WIDE1-202 with 2 Sets of LEDs (No.96) for a total 40W

Voltage

24V-AC/DC built-in LED driver and tilting mounting supports


ATTENTION:

For \*WIDE1 C Always remember to order the female connectors of your choice between:

- Straight female connector with 5mt power cable
- 90° female connector with 5mt power cable

**WIDE1 C - 20W con Connettore Maschio**  
WIDE1 C - 20W with Male Connector

ART.	CODE	VIN	WxLed	cable.mt	Kg
WIDE1 201C-24V-AC/DC	08.01.2.12.20.3	24VAC/DC	20W	*	1,16

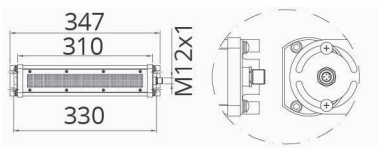


[\\*Connettore femmina a scelta tra: guarda fondo pagina](#)

[\\*Female Connectors at choice: see below](#)


**WIDE1 P - 20W con Pressacavo**  
WIDE1 P - 20W with cable clamp

ART.	CODE	VIN	WxLed	cable.mt	Kg
WIDE1 201P-24V-AC/DC	08.02.2.12.20.3	24VAC/DC	20W	CV 03 1,80	1,16

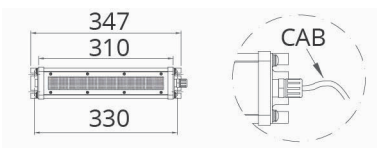

**WIDE1 C - 40W con Connettore Maschio**  
WIDE1 C - 40W with Male Connector

ART.	CODE	VIN	WxLed	cable.mt	Kg
WIDE1 202C-24V-AC/DC	08.04.2.12.40.3	24VAC/DC	40W	*	2,50

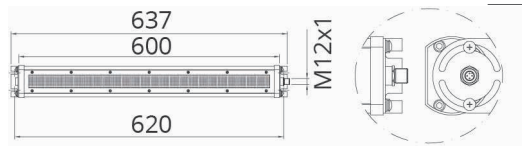


[\\*Connettore femmina a scelta tra: guarda fondo pagina](#)

[\\*Female Connectors at choice: see below](#)

**WIDE1 P - 40W con Pressacavo**  
WIDE1 P - 40W with cable clamp

ART.	CODE	VIN	WxLed	cable.mt	Kg
WIDE1 202P-24V-AC/DC	08.06.2.12.40.3	24VAC/DC	40W	CV 03 1,80	2,50

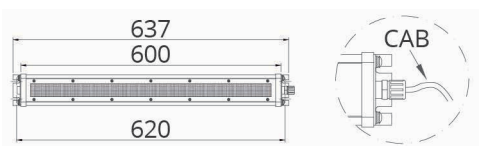

**\*CONNETTORI FEMMINA**  
**\*FEMALE CONNECTORS**

**STAFFE ORIENTABILI INCLUSE**  
**ADJUSTABLE CLAMPS INCLUDED**


**SCATOLA MADRE**  
**MASTER BOX**

STRAIGHT CONNECTOR WITH CABLE 5MT

ART CODE C12F4-00+CAB5 00.09.004.1

90° CONNECTOR WITH CABLE 5MT

ART CODE C12F4-90+CAB5 00.09.003.1



Qty: 6 pcs  
Dimensions (20W): 64x36x25 cm  
Weight: 13 Kg

Dimensions (40W): 92x30x37 cm  
Weight: 20 Kg